

## Effect of presumptions on IEEE 802.15.4 Networks on the device's Beacon Mode Enabled

**Ashley Phillpotts<sup>1</sup>, Daniel Tucker<sup>2\*</sup>**

<sup>1</sup> Software Engineering, Billy Blue College

<sup>2</sup> Government working, Queensland Theological College

\*Email: [ashley-phillEdfor@qtc.edu.au](mailto:ashley-phillEdfor@qtc.edu.au)

---

### ABSTRACT

*In the contention mechanism used to slotted carrier sense multiple access with collision avoidance (CSMA/CA) on IEEE 802.15.4 standard. Device nodes will perform a backoff process as soon as the clear channel assessment (CCA) detects as busy condition. The challenge of CSMA/CA as following: first, when the device nodes detect the channel in busy condition, the device nodes have to increase the value of backoff exponent (BE) which cause range of blind backoff process also increase. Second, when the device nodes detect the channel in busy condition, the device nodes have to increase number of backoff stage which cause more energy consumptions for entering next backoff stage. This article proposes a scheme to improve IEEE 802.15.4 medium access control, called adjustment delay scheme (ADES). ADES not only reduce probability of collision but also reduce probability of going to next backoff stage. The validity of study is proven by simulation experiments. ADES performs better than IEEE 802.15.4 standard in term of the probability of successful packet transmission, network goodput, bandwidth utilization as well as energy consumption in the networks*

**Keywords:** Networks, Beacon Mode, Performs

---

### INTRODUCTION

The IEEE 802.15.4 standard has been designed to specify the physical layer (PHY) and medium access control (MAC) sublayer for low power consumption, short transmission range, and low-rate wireless personal area network (LR-WPAN). The super frame structure in IEEE 802.15.4 standard consist of active portion and inactive portion. The active portion comprised of beacon frame, contention access period (CAP) and contention access period (CFP). While inactive portion used to sleep mode for saving energy. The challenge of CSMA/CA as following: first, when the device nodes detect the channel in busy condition, the device nodes have to increase the value of backoff exponent (BE). However, which cause range of blind backoff process also increase. Second, when the device nodes detect the channel in busy condition, the device nodes have to increase number of backoff stage. However, which cause more energy consumptions for entering next backoff stage. In addition, the blind of backoff process in the slotted carrier sense multiple access with collision avoidance (CSMA/CA) will cause lower channel utilization and more energy consumptions in the networks.

The performance analysis of IEEE 802.15.4 MAC is still one of the important research topics in wireless sensor network. The authors of present an evaluation of the slotted CSMA/CA of IEEE 802.15.4 based on all of its frequency, which only analyze each frequency and compare with each other but not to propose a method. In (Ashrafuzzaman, 2011), the authors use node state and channel state models to analyze the performance of IEEE 802.15.4 MAC that are simple but accurate. The authors also present an analytical model for the slotted CSMA/CA algorithm adopted in the CAP of the beacon-enabled mode in IEEE 802.15.4 MAC, which only considers for the saturated mode. However, they do not consider about acknowledgement (ACK). 2 There are several mathematical analyses based on Markov chain models have been proposed to analyze the performance of IEEE 802.15.4, but they do not consider packet retransmissions (Mark, 2005; Buratti, 2010). Some of the modified Markov chain models have been investigated by considering packet retransmissions but not considering the defer transmission (Tao, 2006; Khanafer, 2011). In (Gao, 2008; Lee, 2015), the authors propose the Markov chain models with considering the postpone transmission. In (Martalo, 2009), the analytical model based on Markov chain for multi-hop cluster network has been studied without considering ACK to confirm the successful of data packet transmission. However, all of the abovementioned models only consider for CSMA/CA standard,

i.e., not proposed new contention mechanism in CAP.

Several authors have been proposed to improve the slotted CSMA/CA using hybrid MAC protocol integrating CSMA and time division multiple access (TDMA) for wireless sensor network (Sarvakar, 2008; Rhee, 2008). In (Patro, 2007) the authors present the analysis correctly for contention access period, but they do not consider about defer transmission if the current superframe is not enough to accommodate transmission. The authors of (Rasheed, 2014), propose an analysis for slotted CSMA/CA for energy consumption, but they only consider about idle condition for the standard and do not propose a new scheme. The authors of (Ha, 2007), propose an enhanced backoff (EB) mechanism shifts the range of backoff period (BP) to reduce redundant backoff and clear channel assessments (CCAs). However, the average delay also possibly increases.


This article proposes an adjustment delay scheme (ADES) for IEEE 802.15.4 which is the extended work from (Lee, 2015) and (Lee, 2006). In (Lee, 2015), the authors focus on how to decrease the collisions between beacons or even between beacon and data packets by adjusting the beacon starting times of PAN and coordinator nodes for cluster tree topology. In [20], the authors focus on assigning adjustable length of GTS slot based on the length of packet and also deciding the precise time for the GTS starting time (GTSstart) and the GTS length (GTSlength) for star topology. However, all of the aforementioned models only consider CSMA/CA standard for contention mechanism. In other words, they did not consider the blind of backoff and probability going to next backoff stage. The performance of ADES for star topology is analyzed by the Markov chain model modified from (Lee, 2005) for considering packet retransmission, ACK and defer transmission, which is to obtain the probability of success transmissions, network goodput, bandwidth utilization as well as energy consumption for IEEE 802.15.4 networks. The major contribution of this article is to model the channel access for star network that analyze the overall performance of IEEE 802.15.4 MAC to reduce probability of going to next backoff stage which can increase probability success packet transmission with adjustment delay at first CCA and second CCA if channel find in busy condition also including addition third CCA to reduce collision in order for improve performance networks.

## METHOD

This article proposes a scheme to improve IEEE 802.15.4 medium access control, called adjustment delay scheme (ADES). ADES not only reduce probability of collision but also reduce probability of going to next backoff stage. The validity of study is proven by simulation experiments. ADES performs better than IEEE 802.15.4 standard in term of the probability of successful packet transmission, network goodput, bandwidth utilization as well as energy consumption in the networks.

## RESULT AND DISCUSSION


ADES is expected to adjust delay if the device node detects the channel in busy condition. If the device node detects channel in busy condition which cause blind of backoff process. In this case can cause degradation of performance networks not only lower bandwidth utilization but also more energy consumption. Let us denote SD and Tdelay be the supeframe duration in second and the time interval of waiting due to CCA busy in second, which can be obtained by Eqs., (Alvi, 2012) respectively, where aBaseSuperframeDuration and Rs denote the minimum duration of the superframe and symbol data rate are equal to 960 symbols and 62500 symbol/second, respectively. Let us also denote Lbeacon and Tbeacon be length of beacon in symbol and time interval of beacon in second, respectively; e.g., Lbeacon is equal to 190 symbols. Let denote CAPades be the length of CAP period in second and can be obtained by Eq. (3)  $CAP_{ades} = SD - Tbeacon$

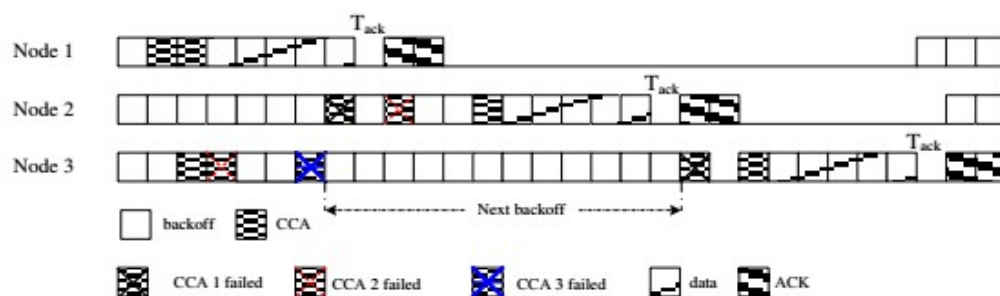

**Figure 1.** An example of implementation of ADES

An example implementation of ADES in the network can be shown in figures 1. The ADES scheme have the probability going to next backoff stage less than IEEE 802.15.4, so that the proposed scheme can improve the network performance


In this section, the proposed ADES based on the IEEE 802.15.4 use slotted carrier sense multiple access with collision avoidance (CSMA/CA) for part of CAP only, because we only consider about active period, while part of CFP is neglected. This article also taking into account the case of acknowledged uplink data transmission is investigated comprehensively via Markov chain model as shown in Figure 2. Let  $b_{i,j,k}$  be the stationary probability at the stochastic state ( $s(t) = i, c(t) = j, \text{ and } r(t) = k$ ), where  $s(t), c(t), \text{ and } r(t)$  represent backoff stage, backoff counter, and number of retransmissions, respectively, shown as Eq. (Park, 2005), where  $b_{i,-1,k}, b_{i,-2,k}, b_{i,-3,k}$  and  $b_{i,-4,k}$  are the stationary probabilities for the first CCA (CCA1), the second CCA (CCA2), the third CCA (CCA3) and packet transmission, respectively, at the  $i$ th backoff stage and the  $k$ th retransmission. Let  $b_{Si,k}$  and  $b_{Ci,k}$  be the stationary probabilities of the successful transmission and collision at the states of  $S_{i,k}$  and  $C_{i,k}$  as shown in Eqs. (Lee, 2006) and (Pollin, 2008), respectively, where  $m$  and  $R$  are the maximum NB stage and retransmissions, i.e., they are equal to 4 and 3, respectively. Let  $b_{DFi,k}, b_{DSAi,k}$  and  $b_{DSBi,k}$  be the stationary probabilities of delay one slot at first CCA busy, delay one slot for second CCA busy for first and delay one slot for second CCA busy for second at the states of  $DF_{i,k}, DSA_{i,k}, \text{ and } DSB_{i,k}$  for the  $i$ th backoff stage and the  $k$ th retransmission as shown in Eqs. (Zhang, 2009) to (Xiao, 2011), respectively.

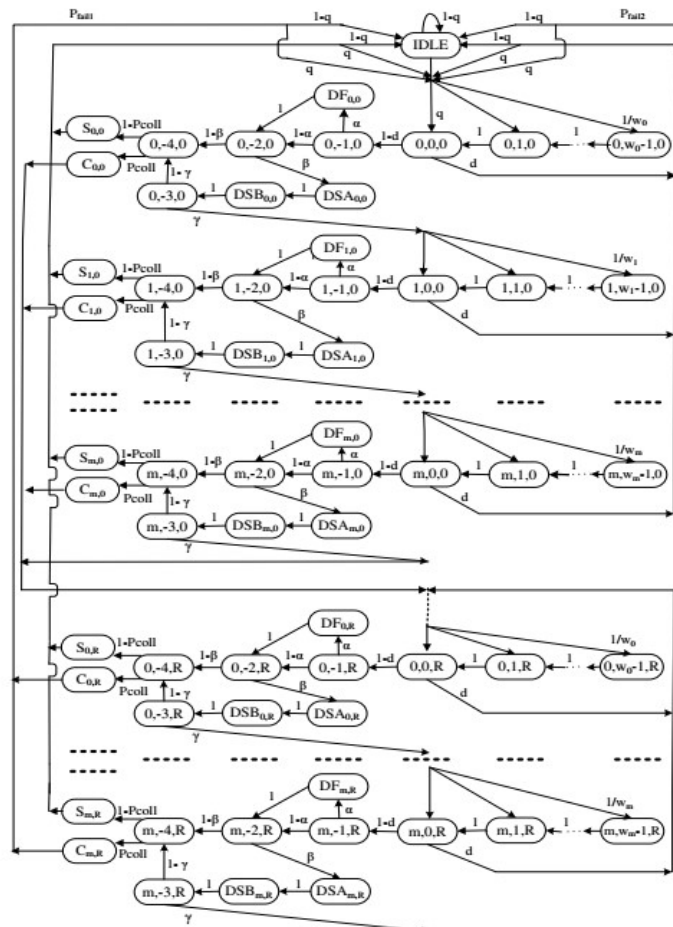

**Figure 2.** Markov chain model for ADES


In this section, simulation experiments for ADES are performed by using the extended Castalia simulator to validate the analysis and performance evaluation. In simulation model, we consider a star topology with one PAN coordinator and 20 device nodes, where  $D_{node}$  is equal to 10 meters. To simulate the performance of power consumption, we consider the radio parameters of Chipcon's CC2420

2.4 GHz for the IEEE 5 802.15.4 RF transceiver (Chipcon, 2007), where the transmitting power  $PWR_{tx}$ , the receiving power  $PWR_{rx}$ , and the idle power  $PWR_{idle}$ , are 31.32 mW, 35.28 mW, and 712  $\mu$ W, respectively (Bougard, 2005). The BO and SO settings follow the IEEE 802.15.4 standard and the proposed ADES algorithm, which are fixed to be six. We compute the probability of successful packet transmission, network goodput, bandwidth utilization and total network energy consumption, where traffic load varies from 0.1 to 1(full loaded).

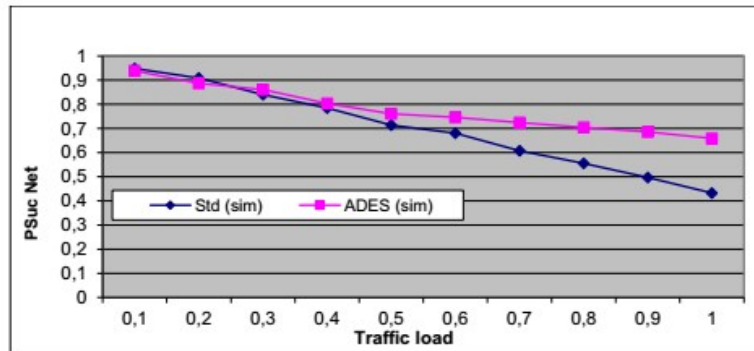


**Figure 3.** The probability of successful transmission against traffic load

Figure 3 shows the probability of successful transmission arriving at the PAN coordinator against the traffic load by simulation. The proposed ADES algorithm can adjust delay for CCA when in busy condition. Adjustment delay and addition third CCA can effectively avoid collision in the network, so that ADES algorithm has higher probability of successful transmissions than that of IEEE 802.15.4 standard.

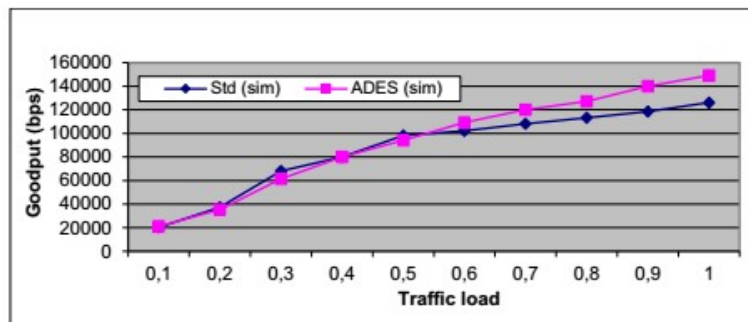

**Figure 4.** The network goodput against traffic load

Figure 4 shows the network goodput against traffic load. It is obvious the network goodput of ADES is higher than that of IEEE 802.15.4 standard. In the light traffic load (i.e., traffic load is equal to 0.1 to 0.6), the network goodput of ADES is almost the same as that of IEEE standard; however, ADES outperforms to the IEEE 802.15.4 standard as the traffic load increases (i.e., traffic load is equal to 0.6 to 1).

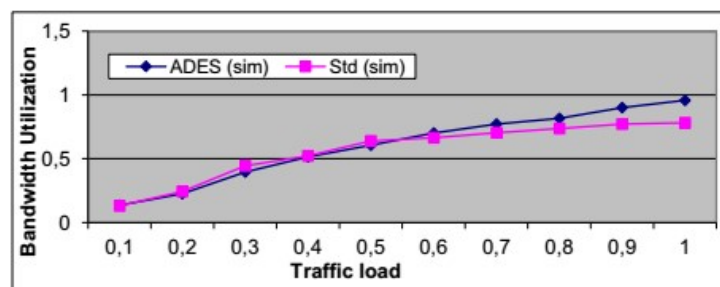

**Figure 5.** The bandwidth utilization against traffic load

Figure 5 shows the bandwidth utilization (BU) against traffic load. The bandwidth utilization of ADES has better efficiency than IEEE 802.15.4 standard. ADES can improve the bandwidth utilization because reduce probability going to next backoff stage, which cause blind of backoff process.

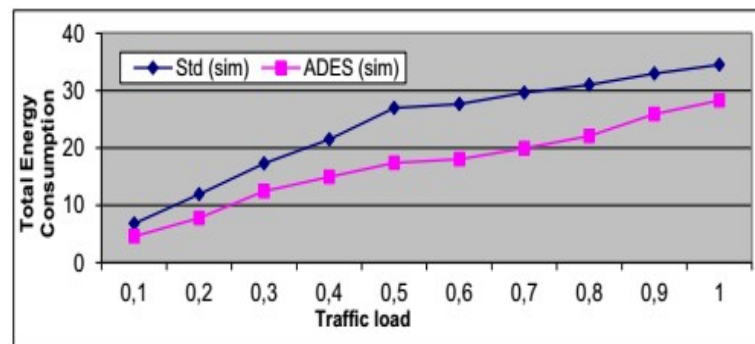


Figure 6. The network energy consumption against traffic load

Figure 6 shows the network energy consumption against traffic load. ADES consumes lesser network energy than that of the IEEE 802.15.4 standard, because the ADES algorithm can adjust the delay when CCA in busy condition which not only reduce probability collision but also probability entering next backoff stage. Moreover, ADES has greater probability of successful transmission than that of the IEEE 802.15.4 standard, especially in heavy traffic load, which means that ADES minimizes the energy consumption when retransmitting data packet. The energy consumption is obtained by summing the energy consumption of PAN coordinator and all of device nodes in the network

## CONCLUSION

From the discussion about figurative language translation above, while it can be concluded that the translation of similes, metaphors, idioms, proverbs, or euphemism, not like the translation in general. Translators must be very clever to find the 'equivalent' of the source language expression with the intent and purpose similar disclosures in the target language. Translators also should pay attention to what purpose does the translation of this and who will read this translation, in accordance with the concept of needs analysis in translation (needs analysis) to determine the purpose of the translation, and the concept of audience design to determine who will read the translation, as will be discussed briefly on the next learning activities. The influence of culture in the use of figurative language is huge. This is due to the comparison, parable, disagreement, or engagement a phrase with its incomparable objects which are within the scope of culture author. Therefore, figurative language translation can be incorporated into intercultural translation, so translators must master not only the culture of the target language but also the culture of the source language. Figurative language is also called figure of speech, which is divided into a comparison figure of speech, figure of speech assertion, innuendo figure of speech, and a figure of speech contention. In this module discussed comparative example translation figure of speech, among other things, similes, metaphors, euphemisms, and proverbs. In figurative language translation, the translator is required to have good ability in culture both languages.

## REFERENCES

- Alvi, A. N., Naqvi, S. S., Bouk, S. H., Javaid, N., Qasim, U., & Khan, Z. A. (2012, November). Evaluation of slotted CSMA/CA of IEEE 802.15. 4. In 2012 seventh international conference on broadband, wireless computing, *communication and applications* (pp. 391-396). IEEE.
- Ashrafuzzaman, K., & Kwak, K. S. (2011). On the performance analysis of the contention access period of IEEE 802.15. 4 MAC. *IEEE communications letters*, 15(9), 986-988.
- Bougard, B., Catthoor, F., Daly, D. C., Chandrakasan, A., & Dehaene, W. (2008). Energy efficiency of the IEEE 802.15. 4 standard in dense wireless microsensor networks: Modeling and improvement perspectives. In *Design, automation, and test in Europe* (pp. 221-234). Springer, Dordrecht.
- Buratti, C. (2010). Performance analysis of IEEE 802.15. 4 beacon-enabled mode. *IEEE transactions on Vehicular Technology*, 59(4), 2031-2045.
- Chipcon, AS. SmartRF® CC2420 datasheet (rev 1.2), Chipcon corp., 2004
- Deng, H., Shen, J., Zhang, B., Zheng, J., Ma, J., & Liu, H. (2008, November). Performance analysis for optimal hybrid medium access control in wireless sensor networks. In *IEEE GLOBECOM 2008-2008 IEEE Global Telecommunications Conference* (pp. 1-5). IEEE.
- Ha, J. Y., Kim, T. H., Park, H. S., Choi, S., & Kwon, W. H. (2007). An enhanced csma-ca algorithm for

- ieee 802.15. 4 lr-wpans. *IEEE Communications Letters*, 11(5), 461-463.
- He, J., Tang, Z., Chen, H. H., & Zhang, Q. (2009). An accurate and scalable analytical model for IEEE 802.15. 4 slotted CSMA/CA networks. *IEEE Transactions on Wireless Communications*, 8(1), 440-448.
- Huang, Y. K., Pang, A. C., & Hung, H. N. (2009). A comprehensive analysis of low-power operation for beacon-enabled IEEE 802.15. 4 wireless networks. *IEEE Transactions on Wireless communications*, 8(11), 5601-5611.
- Jung, C. Y., Hwang, H. Y., Sung, D. K., & Hwang, G. U. (2008). Enhanced Markov chain model and throughput analysis of the slotted CSMA/CA for IEEE 802.15. 4 under unsaturated traffic conditions. *IEEE Transactions on Vehicular Technology*, 58(1), 473-478.
- Khanafer, M., Guennoun, M., & Mouftah, H. T. (2011, June). Adaptive sleeping periods in IEEE 802.15. 4 for efficient energy savings: Markov-based theoretical analysis. In *2011 IEEE International Conference on Communications (ICC)* (pp. 1-6). IEEE.
- Lee, B. H., Yundra, E., Wu, H. K., & Al Rasyid, M. U. H. (2015). Analysis of superframe duration adjustment scheme for IEEE 802.15. 4 networks. *EURASIP Journal on Wireless Communications and Networking*, 2015(1), 1-17.
- Lee, T. J., Lee, H. R., & Chung, M. Y. (2006). MAC throughput limit analysis of slotted CSMA/CA in IEEE 802.15. 4 WPAN. *IEEE Commun. Lett.*, 10(7), 561-563.
- Martalò, M., Busanelli, S., & Ferrari, G. (2009). Markov chain-based performance analysis of multihop IEEE 802.15. 4 wireless networks. *Performance Evaluation*, 66(12), 722-741.
- Park, P., Di Marco, P., Soldati, P., Fischione, C., & Johansson, K. H. (2009, October). A generalized Markov chain model for effective analysis of slotted IEEE 802.15. 4. In *2009 IEEE 6th International Conference on Mobile Adhoc and Sensor Systems* (pp. 130-139). IEEE.
- Park, T. R., Kim, T. H., Choi, J. Y., Choi, S., & Kwon, W. H. (2005). Throughput and energy consumption analysis of IEEE 802.15. 4 slotted CSMA/CA. *Electronics Letters*, 41(18), 1017-1019.
- Patro, R. K., Raina, M., Ganapathy, V., Shamaiah, M., & Thejaswi, C. (2007, October). Analysis and improvement of contention access protocol in IEEE 802.15. 4 star network. In *2007 IEEE International Conference on Mobile Adhoc and Sensor Systems* (pp. 1-8). IEEE.
- Pollin, S., Ergen, M., Ergen, S. C., Bougard, B., Van der Perre, L., Moerman, I., ... & Catthoor, F. (2008). Performance analysis of slotted carrier sense IEEE 802.15. 4 medium access layer. *IEEE Transactions on wireless communications*, 7(9), 3359-3371.
- Rasheed, M. B., Javaid, N., Haider, A., Qasim, U., Khan, Z. A., & Alghamdi, T. A. (2014, May). An energy consumption analysis of beacon enabled slotted CSMA/CA IEEE 802.15. 4. In *2014 28th International Conference on Advanced Information Networking and Applications Workshops* (pp. 372-377). IEEE.
- Rhee, I., Warrier, A., Aia, M., Min, J., & Sichertiu, M. L. (2008). Z-MAC: a hybrid MAC for wireless sensor networks. *IEEE/ACM transactions on networking*, 16(3), 511-524.
- Sarvakar, K., & Patel, P. S. (2008, December). An efficient hybrid MAC layer protocol utilized for wireless sensor networks. In *2008 Fourth International Conference on Wireless Communication and Sensor Networks* (pp. 22-26). IEEE.
- Shrestha, B., Hossain, E., & Camorlinga, S. (2010, November). A Markov model for IEEE 802.15. 4 MAC with GTS transmissions and heterogeneous traffic in non-saturation mode. In *2010 IEEE International Conference on Communication Systems* (pp. 56-61). IEEE.
- Specifications for Low-Rate Wireless Personal Area Networks (WPANs),” IEEE standard for information technology, September 2006.
- Tao, Z., Panwar, S., Gu, D., & Zhang, J. (2006, April). Performance analysis and a proposed improvement for the IEEE 802.15. 4 contention access period. In *IEEE Wireless Communications and Networking Conference, 2006. WCNC 2006*. (Vol. 4, pp. 1811-1818). IEEE.
- Xiao, Z., He, C., & Jiang, L. (2011, June). An analytical model for IEEE 802.15. 4 with sleep mode based on time-varying queue. In *2011 IEEE International Conference on Communications (ICC)* (pp. 1-5). IEEE.
- Zhang, Y., & Shu, F. (2009, April). Packet size optimization for goodput and energy efficiency enhancement in slotted IEEE 802.15. 4 networks. In *2009 IEEE Wireless Communications and Networking Conference* (pp. 1-6). IEEE.